

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 004 094 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
23.10.2002 Bulletin 2002/43

(51) Int Cl.7: **G06T 15/50**

(21) Application number: 98939751.8

(86) International application number:  
PCT/GB98/02488

(22) Date of filing: 19.08.1998

(87) International publication number:  
WO 99/009523 (25.02.1999 Gazette 1999/08)

**(54) SHADING THREE DIMENSIONAL COMPUTER GRAPHICS IMAGES**

SCHATTIERUNG VON DREIDIMENSIONALEN COMPUTERGRAPHIKEN

OMBRAJE D'IMAGES INFORMATIQUES GRAPHIQUES TRIDIMENSIONNELLES

(84) Designated Contracting States:  
DE FR GB IT

(30) Priority: 20.08.1997 GB 9717656

(43) Date of publication of application:  
31.05.2000 Bulletin 2000/22

(73) Proprietor: Imagination Technologies Limited  
Kings Langley, Hertfordshire WD4 8LX (GB)

(72) Inventor: FENNEY, Simon, James  
St. Albans, Hertfordshire AL1 1TT (GB)

(74) Representative: Robson, Aidan John et al  
Reddie & Grose  
16 Theobalds Road  
London WC1X 8PL (GB)

(56) References cited:  
EP-A- 0 764 921 WO-A-95/27268

**EP 1 004 094 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

[0001] This invention relates to the shading of three dimensional computer graphic images, and especially to graphic images generated in real time.

[0002] Many three dimensional computer graphics images are modelled with perfectly flat or smooth surfaces. Usually these surfaces are constructed from a plurality of small triangles to which is applied either flat shading, or smooth shading as described in "Transactions on Computers" IEEE-20 (6) June 1971 pp 623 to 629 by Gouraud, H., graduated shading, or, less frequently Phong shading from CACM 18(6) June 1975 pp 311 to 317 "Illumination for Computer Generated Pictures". Visual detail may be applied to these surfaces via the application of textures. These textures are generally two dimensional images and the process is similar to having an image painted onto a perfectly smooth wall. It does not model any surface roughness or any shading effects which might arise therefrom.

[0003] In computer graphics the way in which light interacts with the surface is referred to as shading. One of the simpler models used for shading is known as Lambert or diffuse shading. It is computed as a function of the direction of the light illuminating the surface and the orientation of that surface. The orientation is represented by a unit vector perpendicular to the surface (a surface normal). The light direction is also preferably assumed to be a unit vector which points from the surface to the point of illumination. In the case of flat shading the surface normal is considered to be constant across the entire surface. With Gouraud shading three surface normals defined at the vertices of each triangle are used. The shading at the vertices of the triangles is calculated from these normals. These shading values are then interpolated across the entire surface. This is a satisfactory approximation in many cases. However, it does lead to shading problems such as mach banding and problems with specular highlights.

[0004] Phong shading gives a superior result to this because it interpolates the surface normally across the triangle and then recalculates the shading at each pixel. However, both of these per pixel operations are considered to be relatively expensive computationally and, therefore, Gouraud shading is therefore more commonly used.

[0005] 3D computer graphics often makes use of specular shading in addition to diffuse lighting. Specular shading is the modelling of glossy reflections of lights. In both types of shading a common basis for the calculation of the shading to be applied is a vector dot product raised to a power. This is shown in equation 1 below.

$$((1-h)+h \cdot \vec{D}_{light} \cdot \vec{D}_{normal})^p$$

[0006] In "simulation of wrinkled surfaces" by Blinn, J. F. in Siggaph 1978 pp 286 to 292 there is proposed the

concept of bump mapping. This uses an adaptation of texturing to deviate surfaces normal on a pixel by pixel basis. The texture data used to form the derivation of the normal is referred to as the bump map.

5 Although the position of the surface is not actually moved in 3D graphic space it appears rough because shading is performed with a surface normal which moves in direction as the surface is traversed.

[0007] This process is known as surface normal perturbation.

10 What is stored in the bump map is an amount by which the surface normal is to deviate from its previous value. Thus, in order to compute the shading applied to a surface it is necessary to retrieve data about the deviation of the surface normal from the bump map prior to applying this deviation to the surface normal. The surface normal then has to be renormalised in dependence on the orientation of the surface to which it is applied. The shading calculation is then performed.

15 [0008] The effect of this leads to realistic dynamic changes in shading as a light source moves relative to the surface. However, computationally the scheme is approximately the same as that of Phong shading and so to date has been restricted to non-real time applications.

20 [0009] The document EP-A-764921 discloses a method for shading a three-dimensional textured computer graphic image comprising the steps of:

25 providing data defining the three-dimensional computer graphic image;  
applying texture data to the image;  
providing a set of surface normal vectors and "bump normal" vectors corresponding to the texture data  
30 applied to the image;  
providing data defining at least one light source illuminating the image;  
for each pixel in the image, deriving a shading value to be applied to that pixel from the set of surface normal vectors and the light source data.

[0010] The surface normal is expressed as horizontal and vertical angles relative to the eye axis in the device coordinates, whereas the bump normal is a rotation mapping that is given in a texturing coordinate system and is applied oixel per pixel to the surface normal.

[0011] We have appreciated that an effect similar to that proposed by Blinn can be implemented with much less computational power thus enabling realistic changes of shading to be implemented in real time.

[0012] Preferably this is implemented in addition to the usual 3D computer graphics rendering systems which are in common usage for texturing and shading.

50 [0013] Preferably, after a surface has been rendered the bump map effects are applied as an additional pass over the surface. For each image element or pixel a bump map texture element is obtained in a way identical to the usual texturing operation. Lighting values are also

interpolated across the surface on a pixel by pixel basis from the light sources in use. The lighting values for a particular pixel are combined with the bump map texel (texture element) to produce an alpha value and a colour and thereby look identical to the usual output of the texturing engine. These are then supplied to the usual blending units to apply the texture. Unlike the approach taken by Blinn each texel of the bump map stores the actual direction of the surface normal after perturbation rather than the displacements of the surface normal. Unlike EP-A-764 921 the invention avoids the trigonometric calculations between the bump and surface normals prior to combining with the light source vectors.

[0014] In efficient bump mapping hardware by Peercy, Airey and Cabral, presented at the Siggraph Conference of 3<sup>rd</sup> August 1997 there is disclosed a bump mapping system which eliminates the costly per-pixel steps of reconstructing a tangent space and perturbing the interpolated normal vector by firstly interpolating vectors that have been transformed into tangent space at polygon vertices and then storing a precomputed perturbed surface normal map as a texture. This reduces the hardware required for known bump mapping systems.

[0015] These normals are given in the surface's coordinate system which is preferably the polar coordinate system. Lighting values are similarly expressed in terms relative to the surface's coordinate system.

[0016] The invention is defined with more precision in the appended claims to which reference should now be made.

[0017] A preferred embodiment of the invention will now be described in detail by way of example with reference to the accompanying drawings in which:

Figure 1 is a block diagram of circuitry a first embodiment of the invention;

Figure 2 is a schematic diagram showing the surface normal and its coordinate system; and

Figure 3 is a block diagram of the bump map hardware of Figure 1.

Figure 4 is a schematic diagram showing the surface normal and a Cartesian coordinate representation system in contrast with the polar coordinates of figure 2;

Figure 5 shows schematically a linear filter applied to texels;

[0018] As described above this invention relates to computer 3D graphics rendering systems and is applicable but not restricted to hardware based rendering systems. A hardware based system is described here by way of example.

[0019] The first embodiment of the invention shown in Figure 1 comprises a modified conventional 3D ren-

dering system. Conventional 3D texture hardware 2 is used to apply texture to the image and rendering hardware 4 then shades the textured image. Conventionally a single connection is provided between these two hardware blocks.

[0020] In the modified system of Figure 1 a store 6 is used for surface bump map direction parameters for a number of different bump maps. This stores a set of surface normals pointing in different directions in dependence on their location in the bump map. These are called up by the bump map hardware 8 which combines the lighting values for a particular pixel with the bump map data from the store 6 to produce an alpha value and a colour. These are identical to the usual output of the 3D texture hardware 2 and are then supplied to the usual blending unit which uses the alpha value to combine the colour with existing colour at that pixel in proportions dependent on the alpha value (alpha is between 0 and 1).

[0021] Thus, the system applies surface normal perturbation effects to a surface as one additional single pass to modify the existing texturing and shading. When it is determined that for a given surface and picture element "pixel" that a bump map pass is required, then the appropriate surface parameters are obtained for that surface. The surface normal for that pixel is determined by accessing the bump map texture associated with the surface in a similar manner to existing texture mapping methods. A direction parameter is also calculated for the pixel by interpolation. This is similar to the RGB interpolation performed for Gouraud shading. Thus the alpha value and colour value are supplied to the blending unit.

[0022] The bump map surface normals stored in store 6 are encoded in polar coordinate as shown in Figure 2. Angle S represents the elevation of the surface normal and goes from 0 to 90°. Angle R is the rotation of the surface normal and goes from 0 to 360°. As the surface normal is a unit vector the length value is always 1 and so it is not required to store this. Thus a saving on memory is achieved.

[0023] In one embodiment of the invention the per surface direction parameters for the lighting sources are also encoded in spherical coordinates with parameters T ranging from 0 to 90° and Q ranging from 0 to 360°. The dot product power function of equation 1 would then be implemented as shown below in equation 2.

$$((1-h)+h(\sin(S)\sin(T)+\cos(S)\cos(T)\cos(R-Q)))^p$$

[0024] The parameter H is a weighting value that lies in the range 0 to 1. The surface direction parameters T and Q can be interpolated in a manner similar to that used in Gouraud shading.

[0025] Another embodiment would include the T and H per surface direction parameters as parameters  $k_1$ ,  $k_2$ ,  $k_3$  thus giving the dot product power function shown below in equation 3.

$$(k_1 + k_2 \sin(S) + k_3 \cos(S)\cos(R-Q))^P$$

[0026] Typically these values would be calculated as shown below in equation 4.

$$k_1=(1-h); \quad k_2=h\sin(T); \quad k_3=h\cos(T);$$

[0027] This gives further flexibility as well as reducing the complexity of the implementation in hardware.

[0028] An embodiment of the invention using the equation shown in equation 3 is illustrated in Figure 3.

[0029] The elevation angle S for the surface normal is first passed to a sine and cosine unit 10 which computes the sine and cosine of the elevation and applies these to multipliers 12 and 14 where they are combined with lighting parameters  $k_2$  and  $k_3$ . At the same time, the rotation angle R of the surface normal has the rotation angle Q of the lighting value subtracted from it in subtractor 16. The cosine of this angle is then derived in cosine unit 18. The output of this unit is unsigned and is fed to a multiplier 20 where it serves to multiply the output of multiplier 14. The output of multiplier 12 is then passed to an adder 22 where it is added to lighting parameter  $k_1$ .

[0030] The output of adder 22 and multiplier 20 are then passed to an add/subtract unit 24. A signed bit 26 supplied by the cosine unit 18 determines whether the adder adds or subtracts the output of multiplier 20 from the output of adder 22.

[0031] The output of this adder is a signed 11 bit number which is supplied to a clamping unit which reduces it to the range 0 to 255 (8 bits) and outputs this to a power unit 30 which raises its value to a power p which is supplied to the power unit.

[0032] In this embodiment the S and R values obtained from the bump map texture are both encoded as 8 bit unsigned numbers. For S 0 to 255 represents angles of 0 to almost 90° (256 would represent 90° exactly) while for R 0 to 255 represents angles of 0 to almost 360° (256 would represent 360° exactly).

[0033] The units of Figure 3 show the number of bits and whether or not those integers are signed or unsigned. U x represents an unsigned x bit integer. While S x represents a signed x bit integer.

[0034] Thus, the alpha output to the blending unit is provided along with a colour from the existing 3D texture hardware 2. The existing colour and the new colour are then combined in the blending hardware 4 to produce a new value for that particular pixel.

[0035] Using this method has several advantages. Firstly, storage of surface normals as polar co-ordinates makes the bump map data compact compared to the method of Blinn which used surface normal displacements. Furthermore, renormalisation of the surface normals is not necessary because of the nature of storage as surface normals. Finally, interpolation of light direc-

tion is a relatively straight forward calculation to be performed since in most scenes there will only be a small number of light sources on which the lighting direction has to be based. This enables rendering to be performed in real time.

[0036] The bump mapping technique described above has some shortcomings. These are:

1. Interpolation of the lighting direction given at each vertex is 'tricky', as the direction is specified in polar coordinates. Although polar coordinates allow greater precision with the direction specification and do not need normalisation, to perform the interpolation requires significant modification to the iterator units. Because of this, the hardware can assume that the light direction is constant across each polygon. This effectively eliminates Phong shading.

2. For similar reason, bilinear texturing computations are more complicated. Although some modifications were made to perform angular bilinear, the actual results are not ideal.

3. The system cannot model light directions that are 'below' the horizon - these must be converted to an approximate direction that is on the horizon.

4. The software interface bears little resemblance to the actual hardware interface. This means extra work for the drivers or at least to the application.

[0037] The second embodiment described below addresses these issues. To do this there are two major changes to the implementation:

1. The light direction vector is now specified in "X, Y,Z" fixed point coordinates. This is very similar to a typical software interface, in which the light direction vector is given in floating point coordinates. Ideally, the floating point vector will have been normalised.

2. The bump map texel directions are also now specified in Cartesian coordinates, except that one component can be eliminated due to redundancy. We thus only store "X" and "Z" per texel.

[0038] The idea of specifying bumps and light directions in a local vertex coordinate system remains the same. Converting a height map to the new format is much easier than the old, since no trigonometry is required. Additionally, the new technique includes a 'glossiness' parameter that allows the modelling of specular highlights.

[0039] As in the first embodiment each texel stores the 'angle' or 'surface normal' of the bumpy surface at that particular texel, and it is assumed that the vector can lie anywhere within a hemisphere, as shown in fig-

ure 4.

[0040] We are not interested in the length of this vector (as it is assumed to be of unit length) but only in its angle.

In the first embodiment, this vector was stored using polar coordinates, however these are a nuisance to interpolate.

[0041] In the second embodiment, the vector is represented in the more usual Cartesian coordinate system. The obvious way to store this would be X,Y,Z, where Y is always positive, and X & Z are signed values, however, we are typically limited to only 16 bits. If, however, we scale the vector such that

$$|x_s| + y_s + |z_s| = 1$$

then there is no need to store the Y component at all, since it can be derived from the other two values. Note that this vector is no longer of unit length. Also all components of this vector are  $\leq 1$ , and that the length of this scaled vector is also  $\leq 1$ .

[0042] Expressing this in terms of a 16 bit texel, we would have the following:

UNIT8 TexelX, TexelY;

TexelX = ((int) (Xscaled \* 127.0f)) + 127;

TexelZ = ((int) (Zscaled \* 127.0f)) + 127;

[0043] This packs X and Z as *offset 8* bit values. That is, a value of 0 represents  $-127/127$ , while 254 represents  $+127/127$ . We use this notation rather than the usual 2's complement to make the bilinear interpolation straight-forward.

[0044] To extract the X,Y and Z components 'in the hardware', we do...

INT9 BumpX, BumpZ;  
UINT8 Bumpy;

BumpX = (TexelX - 127)\* 2;

BumpZ = (TexelZ - 127)\* 2;

Bumpy = 255 - ABS (BumpX) - ABS(BumpZ);

[0045] We are guaranteed that Y is positive as (ABS(BumpX)+ABS(BumpZ)) must be  $\leq 255$ . (The above could probably be expressed better).

[0046] TexelX and TexelZ can be the results from the linear/bilinear/trilinear filtering.

[0047] One of the problems with the first embodiment

is the behaviour of the bilinear filtering. With angles, there is a problem with wrapping around or taking the shortest interpolation path. This is eliminated with the X/Z scheme.

[0048] The interpolation is performed with just the TexelX and TexelZ components, and the Y is calculated from the filtered result. Since these values are in the range 0..255, the standard RGB filtering hardware is directly applicable. For the following examples, only a linear 'filter' will be used since both bilinear and trilinear are repeated linears.

[0049] Figure 5 shows a view from above looking down on the bump direction hemisphere. The dotted diamond shape represents the limits of the scaled X and Z values, which when renormalised with the computed Y value would stretch out to the boundary of the hemisphere. Three example linear interpolations in X and Z are shown.

[0050] For *Path A*, the interpolation would result in an angle that goes up and over the pole of the hemisphere - which is ideal. The previous method would have chosen a path that ran in a circle 'copying' the circumference. For *Path B*, the interpolation would stay close to the circumference of the hemisphere. *Path C*, should also result in a sensible interpolation with a rise and fall in the 'Y' component.

[0051] The only likely quibble with this scheme is that the rate of change of the angle may not be constant, but this seems very minor.

[0052] To prevent loss of accuracy with fixed point implementations, it is important that the length of the vector should not decrease too greatly, since in a fixed point system, bits will be lost. In this encoding, the minimum length would occur when  $|x_s| = y_s = |z_s| = 1/3$ , resulting in a length of  $1/3$ . This loses less than 2 bits of accuracy, and so is acceptable.

[0053] There are two things we must guard against. The first is that not all possible combinations of 'texel' contents are valid. Since we have specified that  $|x_s| + y_s + |z_s| = 1$  a texel that has  $|x_s| + |z_s| > 1$  is clearly invalid. We must therefore, protect against such occurrences.

[0054] The second point is that even if the original texels are valid, there is a small chance that the bilinear unit will produce X and Z values which also just exceed these legal values.

[0055] As with the alternate bump format the light direction vector is stored in Cartesian coordinates. The only space we have available is the OffsetRGB/original-BumpK values, as an example we may have 8 bits for each of the X, Y, and Z components. These values all need to be signed, and to keep accuracy, it is assumed that the light direction vector is normalised before conversion to integer. The per-vertex values would therefore be calculated from...

int8 VertX, VertY, VertZ;

VertLightX = ((int) (LightDir(0) \* 127.0f)) & 0xFF;

VertLightY = ((int) (LightDir(1) \* 127.0f)) & 0xFF;

VertLightZ = ((int) (LightDir(2) \* 127.0f)) & 0xFF;

[0056] Since we are assuming that each vertex light vector is of unit length and because we are using 'linear' interpolation, the vector for a particular pixel will have a length that is  $\leq 1$ . As with the bump map, it is important that the in-between vectors are not too short or else too much accuracy will be lost.

[0057] If we assume that the maximum sensible angle difference will be  $120^\circ$ , then the shortest vector will be  $\sin(30^\circ) = \frac{1}{2}$ . We will therefore only lose about 1 bit of accuracy due to the shortening of vectors.

[0058] To have the chance of 'smooth' animation, it is important that small changes in light direction can be modelled. This will be of maximum importance near where the light direction = (0,1,0) ie. on the horizon so examining the minimum integer variation that seems possible we get [2,254,0]. This appears to be about an angle of 0.1 degrees, which seems small enough.

[0059] The shading "dot product" computation is much simpler than it is with polar coordinates and is implemented in a well known manner.

[0060] To simulate glossy highlights, a 'power' function is usually applied to the dot product so that bright areas become concentrated. The typical Phong lighting model raises the dot product to an arbitrary power, but this is too expensive to implement in hardware.

[0061] A cheaper, but more than satisfactory function is to use a quadratic approximation as shown below.

[0062] Let X be the result of the dot product,

[0063] C be a 'fixed point' 8 bit concentration value, where  $C=0$  ( $=0.0$ ) gives a linear output, and  $C=255$  ( $=1.0$ ) gives maximum concentration.

[0064] We compute...

- $k=C+8$ ; ( $k$  is a 9 bit value with 3 bits of fraction)
- $L=\text{MAX}(0, 1023-(k*(1023-X)) \gg 3)$ ;  $L$  is a 10 bit fractional value
- $Q=(L*L) \gg 10$   $Q$  is a 10 bit fractional value
- $P=L+C*(Q-L) \gg 8$ ;

[0065] P is then the fixed point result of the power function. Note that  $Q \leq L$  and so the final calculation will require signed maths.

[0066] In total, the highlight function will require 5 add/subtracts and 3 multiplies, although a couple of these are rather simple degenerate cases.

[0067] Thus, it will be appreciated that preferred embodiments of the present invention provide a system which enables textured surfaces to be shaded much more efficiently than has been possible.

## Claims

1. A method for shading a three dimensional textured computer graphic image comprising the steps of:

providing data defining the three dimensional computer graphic image;  
providing a set of bump map surface normal vectors corresponding to the texture data for the image wherein the surface normal vectors are stored in a two dimensional local coordinate system;  
providing data defining at least one light source and its direction illuminating the image wherein the light source is defined in the same local coordinate system; and,  
for each pixel in the image, deriving a shading value to be applied to that pixel from the set of surface normal vectors and the light source data.

2. A method according to claim 1 in which the surface normal vectors are stored in polar coordinates.

3. A method according to claim 1 or 2 in which the light source data is stored in polar coordinates.

4. A method according to claim 1 in which the step of deriving a shading value to be applied to a pixel comprises deriving a colour value and a blending value from the light source data and combining this colour value with existing colour data from that pixel in dependence on the blending value.

5. A method according to claim 1 in which the surface normal vector is stored in two-dimensional Cartesian coordinates.

6. A method according to claim 1 or 5 in which the light source data is stored in two-dimensional Cartesian coordinates.

7. A method according to any preceding claim comprising the step of applying a linear filter to the texture data at least once to map values to individual pixels.

8. A method according to any preceding claim including the step of applying a glossiness parameter to a pixel.

9. Apparatus for shading a three dimensional textured computer graphic image comprising:

means- for providing data defining the three dimensional computer graphic image;  
means for providing a set of surface normal vectors corresponding to the texture data ap-

plied to the image wherein the surface normal vectors are stored in a two-dimensional local coordinate system;  
 means for providing data defining at least one light source and its direction illuminating the image wherein the direction of the light source is provided in the same local coordinate system; and  
 means for deriving a shading value to be applied to each pixel in the image from the set of surface normal vectors and the light source data.

10. Apparatus according to claim 9 in which the surface normals are stored in polar coordinates.

11. Apparatus according to claim 9 or 10 in which light source data is stored in polar coordinates.

12. Apparatus according to claim 9 in which the surface normals are stored in two-dimensional Cartesian coordinates.

13. Apparatus according to claim 9 or 12 in which the light source data is stored in two-dimensional Cartesian coordinates.

14. Apparatus according to any of claims 9 to 13 comprising means for applying a linear filter at least once to the texture data to map values onto individual pixels.

15. A method according to claim 9 in which means for deriving a shading value to be applied to a pixel comprises means for deriving a colour value and a blending value from the light source data and means for combining the colour value with an existing colour value in dependence on the blending value.

#### Patentansprüche

1. Verfahren zum Schattieren eines dreidimensionalen texturierten Computergrafikbilds, das die folgenden Schritte umfasst:

Bereitstellen von Daten, die das dreidimensionale Computergrafikbild definieren;  
 Bereitstellen eines Satzes von Bump-Map-Flächennormalenvektoren, die den Texturdaten für das Bild entsprechen, wobei die Flächennormalenvektoren in einem zweidimensionalen lokalen Koordinatensystem gespeichert werden;  
 Bereitstellen von Daten, die wenigstens eine Lichtquelle und ihre das Bild beleuchtende Richtung bestimmen, wobei die Lichtquelle in

dem gleichen lokalen Koordinatensystem definiert ist; und

Ableiten, für jeden Pixel im Bild, einen auf diesen Pixel anzuwendenden Schattierungswert aus dem Satz von Flächennormalenvektoren und den Lichtquellendaten.

2. Verfahren nach Anspruch 1, bei dem die Flächennormalenvektoren in Polarkoordinaten gespeichert werden.

3. Verfahren nach Anspruch 1 oder 2, bei dem die Lichtquellendaten in Polarkoordinaten gespeichert werden.

4. Verfahren nach Anspruch 1, bei dem der Schritt des Ableitens eines auf einen Pixel anzuwendenden Schattierungswertes das Ableiten eines Farbwertes und eines Mischwertes aus den Lichtquellendaten und das Kombinieren dieses Farbwertes mit existierenden Farbdaten von diesem Pixel in Abhängigkeit vom Mischwert umfasst.

5. Verfahren nach Anspruch 1, bei dem der Flächennormalenvektor in zweidimensionalen kartesischen Koordinaten gespeichert wird.

6. Verfahren nach Anspruch 1 oder 5, bei dem die Lichtquellendaten in zweidimensionalen kartesischen Koordinaten gespeichert werden.

7. Verfahren nach einem der vorhergehenden Ansprüche, das den Schritt umfasst, einen linearen Filter wenigstens einmal auf die Texturdaten anzuwenden, um Werte auf einzelne Pixel abzubilden.

8. Verfahren nach einem der vorhergehenden Ansprüche mit dem Schritt des Anwendens eines Glanzparameters auf einen Pixel.

9. Vorrichtung zum Schattieren eines dreidimensionalen texturierten Computergrafikbildes, die Folgendes umfasst:

Einrichtung zum Bereitstellen von Daten, die das dreidimensionale Computergrafikbild definieren;

Einrichtung zum Bereitstellen eines Satzes von Flächennormalenvektoren, die den auf das Bild angewendeten Texturdaten entsprechen, wobei die Flächennormalenvektoren in einem zweidimensionalen lokalen Koordinatensystem gespeichert werden;

Einrichtung zum Bereitstellen von Daten, die wenigstens eine Lichtquelle und ihre das Bild beleuchtende Richtung bestimmen, wobei die Richtung der Lichtquelle in dem gleichen lokalen Koordinatensystem bereitgestellt wird; und

Einrichtung zum Ableiten eines auf jeden Pixel im Bild anzuwendenden Schattierungswertes aus dem Satz von Flächennormalenvektoren und den Lichtquellendaten.

10. Vorrichtung nach Anspruch 9, bei der die Flächennormalen in Polarkoordinaten gespeichert werden.
11. Vorrichtung nach Anspruch 9 oder 10, bei der Lichtquellendaten in Polarkoordinaten gespeichert werden.
12. Vorrichtung nach Anspruch 9, bei der die Flächennormalen in zweidimensionalen kartesischen Koordinaten gespeichert werden.
13. Vorrichtung nach Anspruch 9 oder 12, bei der die Lichtquellendaten in zweidimensionalen kartesischen Koordinaten gespeichert werden.
14. Vorrichtung nach einem der Ansprüche 9 bis 13, die eine Einrichtung zum Anwenden eines linearen Filters wenigstens einmal auf die Texturdaten, um Werte auf einzelne Pixel abzubilden, hat.
15. Verfahren nach Anspruch 9, bei der eine Einrichtung zum Ableiten eines auf einen Pixel anzuwendenden Schattierungswertes eine Einrichtung zum Ableiten eines Farbwertes und eines Mischwertes aus den Lichtquellendaten und eine Einrichtung zum Kombinieren des Farbwertes mit einem existierenden Farbwert in Abhängigkeit vom Mischwert aufweist.

#### Revendications

1. Procédé de lissage d'une image informatique graphique texturée tridimensionnelle comprenant les étapes de :  
  
fourniture de données définissant l'image informatique graphique tridimensionnelle ;  
fourniture d'un ensemble de vecteurs de normales à la surface de placage de rugosité correspondant aux données de texture de l'image où les vecteurs de normales à la surface sont mémorisés dans un système de coordonnées locales bidimensionnelles ;  
fourniture de données définissant au moins une source de lumière et son sens d'éclairage de l'image où la source de lumière est définie dans le même système de coordonnées locales ; et, pour chaque pixel dans l'image, dérivée d'une valeur de lissage à appliquer à ce pixel à partir de l'ensemble de vecteurs de normales à la surface et des données de source de lumière.

2. Procédé selon la revendication 1, dans lequel les vecteurs de normales à la surface sont mémorisés en coordonnées polaires.
3. Procédé selon la revendication 1 ou 2, dans lequel les données de source de lumière sont mémorisées en coordonnées polaires.
4. Procédé selon la revendication 1, dans lequel l'étape de dérivée d'une valeur de lissage à appliquer à un pixel comprend la dérivée d'une valeur de couleur et d'une valeur de mélange à partir des données de source de lumière et la combinaison de cette valeur de couleur avec des données de couleur existantes de ce pixel en fonction de la valeur de mélange.
5. Procédé selon la revendication 1, dans lequel le vecteur de normale à la surface est mémorisé en coordonnées cartésiennes bidimensionnelles.
6. Procédé selon la revendication 1 ou 5, dans lequel les données de source de lumière sont mémorisées en coordonnées cartésiennes bidimensionnelles.
7. Procédé selon l'une quelconque des revendications précédentes, comprenant l'étape d'application d'un filtre linéaire aux données de texture au moins une fois pour mettre en correspondance des valeurs avec des pixels individuels.
8. Procédé selon l'une quelconque des revendications précédentes, comportant l'étape d'application d'un paramètre de brillance à un pixel.
9. Dispositif de lissage d'une image informatique graphique texturée tridimensionnelle comprenant :  
  
un moyen pour fournir des données définissant l'image informatique graphique tridimensionnelle ;  
un moyen pour fournir un ensemble de vecteurs de normales à la surface correspondant aux données de texture appliquées à l'image où les vecteurs de normales à la surface sont mémorisés dans un système de coordonnées locales bidimensionnelles ;  
un moyen pour fournir des données définissant au moins une source de lumière et son sens d'éclairage de l'image où la source de lumière est définie dans le même système de coordonnées locales ; et  
un moyen pour dériver une valeur de lissage à appliquer à chaque pixel dans l'image à partir de l'ensemble de vecteurs de normales à la surface et des données de source de lumière.
10. Dispositif selon la revendication 9, dans lequel les



normales à la surface sont mémorisées en coordonnées polaires.

11. Dispositif selon la revendication 9 ou 10, dans lequel les données de source de lumière sont mémorisées en coordonnées polaires. 5
12. Dispositif selon la revendication 9, dans lequel les normales à la surface sont mémorisées en coordonnées cartésiennes bidimensionnelles. 10
13. Dispositif selon la revendication 9 ou 12, dans lequel les données de source de lumière sont mémorisées en coordonnées cartésiennes bidimensionnelles. 15
14. Dispositif selon l'une quelconque des revendications 9 à 13, comprenant un moyen pour appliquer un filtre linéaire au moins une fois aux données de texture pour mettre en correspondance des valeurs avec des pixels individuels. 20
15. Procédé selon la revendication 9, dans lequel le moyen pour dériver une valeur de lissage à appliquer à un pixel comprend un moyen pour dériver une valeur de couleur et une valeur de mélange à partir des données de source de lumière et un moyen pour combiner la valeur de couleur avec une valeur de couleur existante en fonction de la valeur de mélange. 25  
30

35

40

45

50

55

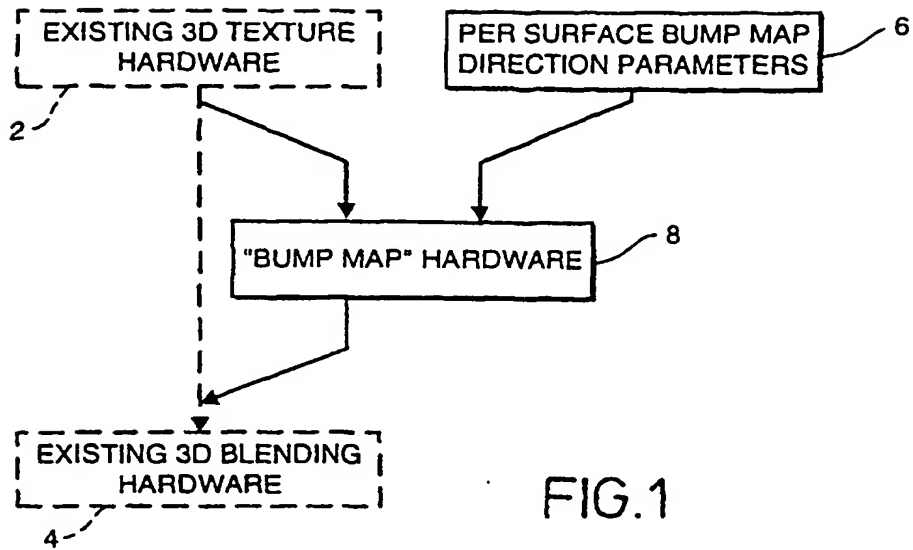


FIG.1

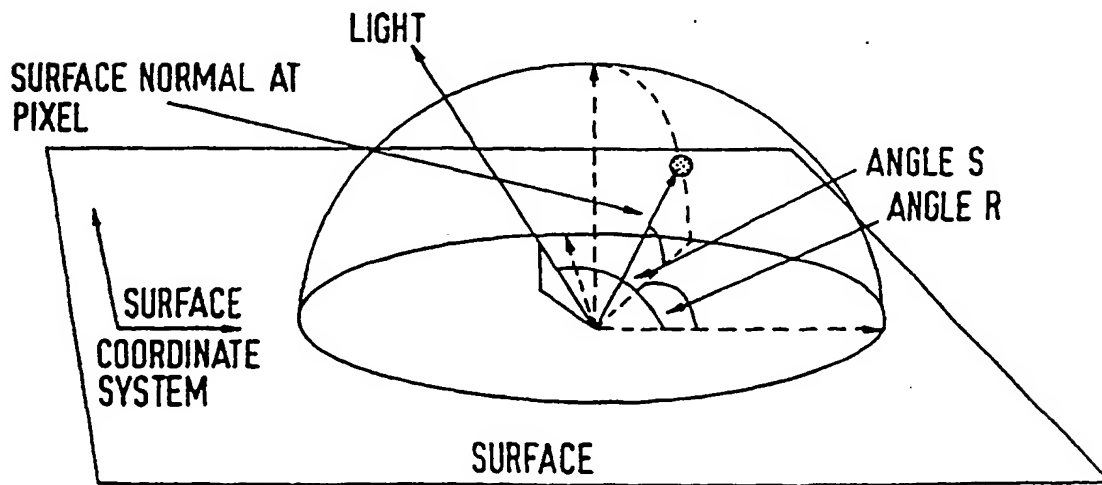


FIG.2

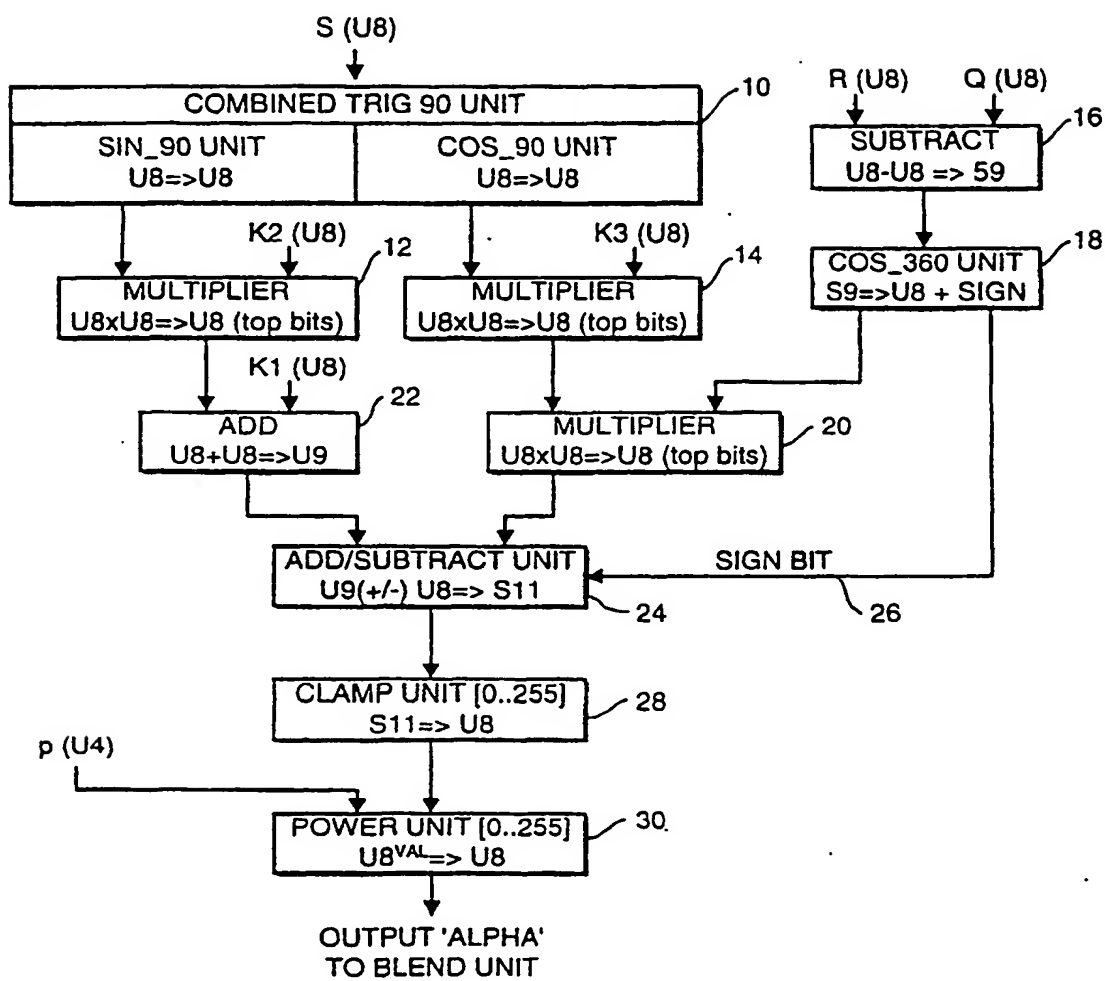


FIG.3

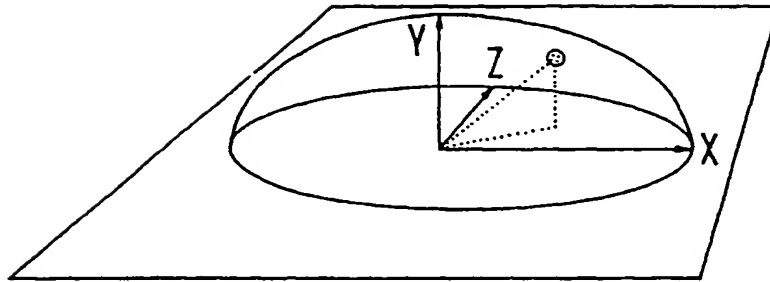


FIG. 4

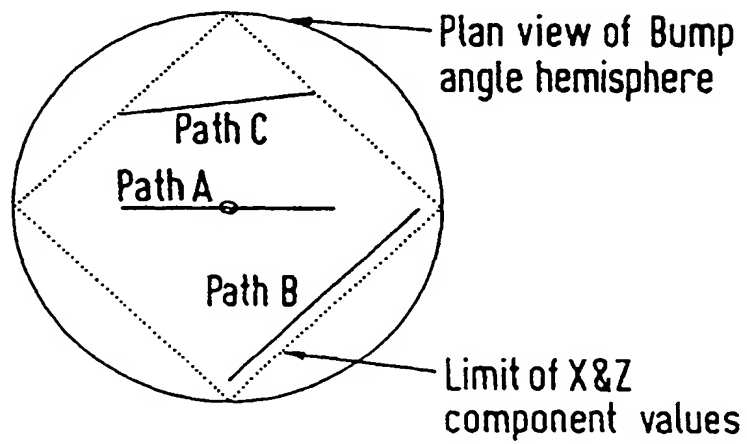


FIG. 5